

Leveling Feet

with Mounting Holes, Stainless Steel,
Turned Base Plate

SPECIFICATION

Type (Base plate)

- Type **D0**: Fine turned, without rubber underlay
- Type **D1**: Fine turned, with rubber underlay, inlaid, black

Versions of threaded stem

- Version **S**: Without nut, external hex at the bottom
- Version **SK**: With nut, external hex at the bottom
- Version **T**: Without nut, wrench flat at the bottom
- Version **TK**: With nut, wrench flat at the bottom

Base plate

Stainless steel AISI 316L

Threaded stem

Stainless steel AISI 316L

Hex nuts ISO 4032

Stainless steel

Mounting screw

Stainless steel

Rubber underlay

Acrylonitrile butadiene rubber (NBR)

- Black
- Hardness 70 Shore A
- Inserted

INFORMATION

Leveling feet GN 24 are particularly suitable for use in aggressive environments.

The leveling feet are supplied assembled and cannot be disassembled.

TECHNICAL INFORMATION

- Load Rating Information (see page)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)




LOAD RATING OF LEVELING FEET

At a spindle thread size M 10 and higher, the static load of the leveling feet GN 21 / GN 22 / GN 23 / GN 24 is limited owing to the permissible contact pressure of the adjustment spindle acting on the base plate (at a spindle strength $\geq 500 \text{ N/mm}^2$). The values given in the table (valid for type D0 without rubber underlay) assume a clean pressure load perpendicular to the base plate. Bending and buckling stress which often occurs in practice results in a lower load-bearing capacity of the adjustment spindle and may have to be taken into account.


The details given on strength are non-binding guide values without any liability. In general, they do not constitute a warranty or quality.

The user must determine from case to case if a product is suitable for the intended purpose or use. Environmental factors may influence the stated values.


GN 21 / 22

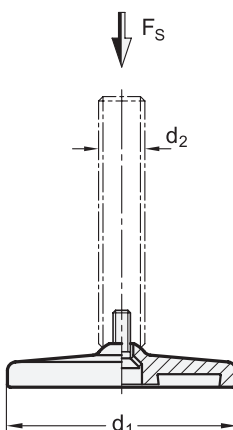


GN 23 / GN 24

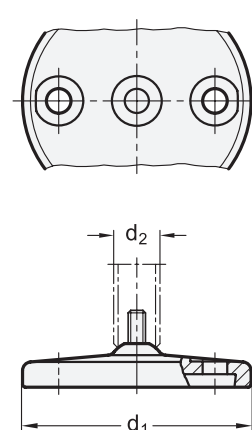


Versions of threaded stem	
S / SK: External hex at the bottom at d_2 M 8, M 10, M 12	T / TK: Wrench flat at the bottom at d_2 M 16, M 20, M 24, M 30

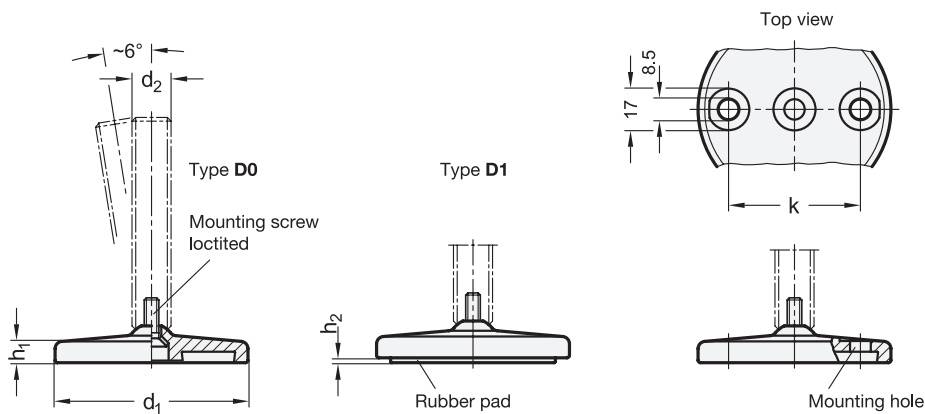

Versions of threaded stem

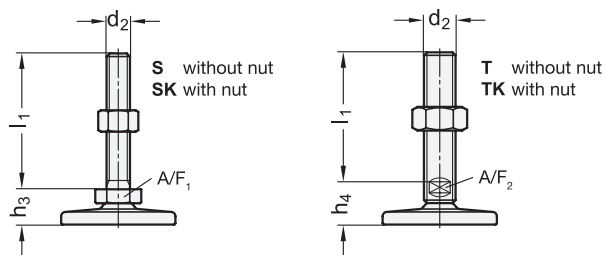

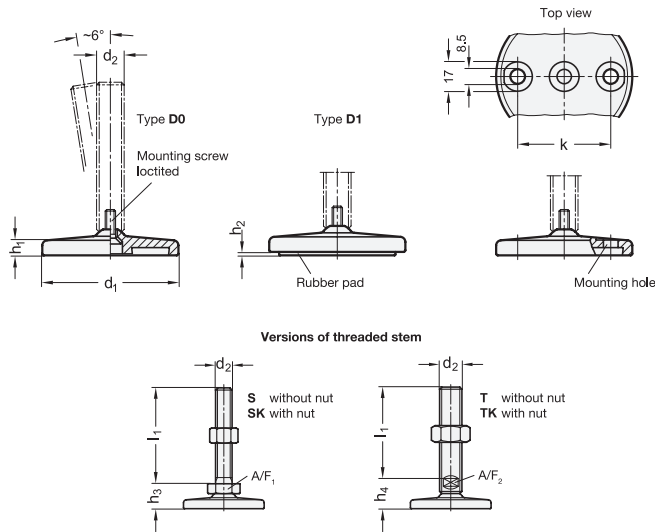

GN 24-S


STAINLESS STEEL

Description	d1	d2	l1	k	h1	h2	h3	A/F1	Static load in kN	
GN 24-80-M8-40-D0-S	80	M 8	40	54.5	8.5	-	19.5	17	6	263
GN 24-80-M8-40-D1-S	80	M 8	40	54.5	8.5	2	19.5	17	6	283
GN 24-80-M8-50-D0-S	80	M 8	50	54.5	8.5	-	19.5	17	6	266
GN 24-80-M8-50-D1-S	80	M 8	50	54.5	8.5	2	19.5	17	6	287
GN 24-80-M8-63-D0-S	80	M 8	63	54.5	8.5	-	19.5	17	6	272
GN 24-80-M8-63-D1-S	80	M 8	63	54.5	8.5	2	19.5	17	6	292
GN 24-80-M10-50-D0-S	80	M 10	50	54.5	8.5	-	19.5	17	11	278
GN 24-80-M10-50-D1-S	80	M 10	50	54.5	8.5	2	19.5	17	11	298
GN 24-80-M10-60-D0-S	80	M 10	60	54.5	8.5	-	19.5	17	11	284
GN 24-80-M10-60-D1-S	80	M 10	60	54.5	8.5	2	19.5	17	11	304
GN 24-80-M10-80-D0-S	80	M 10	80	54.5	8.5	-	19.5	17	11	296
GN 24-80-M10-80-D1-S	80	M 10	80	54.5	8.5	2	19.5	17	11	316
GN 24-80-M10-100-D0-S	80	M 10	100	54.5	8.5	-	19.5	17	11	308
GN 24-80-M10-100-D1-S	80	M 10	100	54.5	8.5	2	19.5	17	11	329
GN 24-80-M12-60-D0-S	80	M 12	60	54.5	8.5	-	19.5	17	16	300
GN 24-80-M12-60-D1-S	80	M 12	60	54.5	8.5	2	19.5	17	16	320
GN 24-80-M12-80-D0-S	80	M 12	80	54.5	8.5	-	19.5	17	16	317
GN 24-80-M12-80-D1-S	80	M 12	80	54.5	8.5	2	19.5	17	16	338
GN 24-80-M12-100-D0-S	80	M 12	100	54.5	8.5	-	19.5	17	16	335
GN 24-80-M12-100-D1-S	80	M 12	100	54.5	8.5	2	19.5	17	16	355
GN 24-80-M12-125-D0-S	80	M 12	125	54.5	8.5	-	19.5	17	16	357
GN 24-80-M12-125-D1-S	80	M 12	125	54.5	8.5	2	19.5	17	16	378
GN 24-100-M8-40-D0-S	100	M 8	40	70.5	9	-	20.5	17	6	440
GN 24-100-M8-40-D1-S	100	M 8	40	70.5	9	3	20.5	17	6	478
GN 24-100-M8-50-D0-S	100	M 8	50	70.5	9	-	20.5	17	6	444
GN 24-100-M8-50-D1-S	100	M 8	50	70.5	9	3	20.5	17	6	482
GN 24-100-M8-63-D0-S	100	M 8	63	70.5	9	-	20.5	17	6	449
GN 24-100-M8-63-D1-S	100	M 8	63	70.5	9	3	20.5	17	6	488
GN 24-100-M10-50-D0-S	100	M 10	50	70.5	9	-	20.5	17	11	455
GN 24-100-M10-50-D1-S	100	M 10	50	70.5	9	3	20.5	17	11	494
GN 24-100-M10-60-D0-S	100	M 10	60	70.5	9	-	20.5	17	11	461
GN 24-100-M10-60-D1-S	100	M 10	60	70.5	9	3	20.5	17	11	500
GN 24-100-M10-80-D0-S	100	M 10	80	70.5	9	-	20.5	17	11	473
GN 24-100-M10-80-D1-S	100	M 10	80	70.5	9	3	20.5	17	11	512
GN 24-100-M10-100-D0-S	100	M 10	100	70.5	9	-	20.5	17	11	486
GN 24-100-M10-100-D1-S	100	M 10	100	70.5	9	3	20.5	17	11	524
GN 24-100-M12-60-D0-S	100	M 12	60	70.5	9	-	20.5	17	16	477
GN 24-100-M12-60-D1-S	100	M 12	60	70.5	9	3	20.5	17	16	516
GN 24-100-M12-80-D0-S	100	M 12	80	70.5	9	-	20.5	17	16	495
GN 24-100-M12-80-D1-S	100	M 12	80	70.5	9	3	20.5	17	16	533
GN 24-100-M12-100-D0-S	100	M 12	100	70.5	9	-	20.5	17	16	512
GN 24-100-M12-100-D1-S	100	M 12	100	70.5	9	3	20.5	17	16	551
GN 24-100-M12-125-D0-S	100	M 12	125	70.5	9	-	20.5	17	16	534
GN 24-100-M12-125-D1-S	100	M 12	125	70.5	9	3	20.5	17	16	573

GN 24-SK

STAINLESS STEEL

Description	d1	d2	l1	k	h1	h2	h3	A/F1	Static load in kN	
GN 24-80-M8-40-D0-SK	80	M 8	40	54.5	8.5	-	19.5	17	6	268
GN 24-80-M8-40-D1-SK	80	M 8	40	54.5	8.5	2	19.5	17	6	289
GN 24-80-M8-50-D0-SK	80	M 8	50	54.5	8.5	-	19.5	17	6	272
GN 24-80-M8-50-D1-SK	80	M 8	50	54.5	8.5	2	19.5	17	6	293
GN 24-80-M8-63-D0-SK	80	M 8	63	54.5	8.5	-	19.5	17	6	277
GN 24-80-M8-63-D1-SK	80	M 8	63	54.5	8.5	2	19.5	17	6	298
GN 24-80-M10-50-D0-SK	80	M 10	50	54.5	8.5	-	19.5	17	11	288
GN 24-80-M10-50-D1-SK	80	M 10	50	54.5	8.5	2	19.5	17	11	309
GN 24-80-M10-60-D0-SK	80	M 10	60	54.5	8.5	-	19.5	17	11	295
GN 24-80-M10-60-D1-SK	80	M 10	60	54.5	8.5	2	19.5	17	11	315
GN 24-80-M10-80-D0-SK	80	M 10	80	54.5	8.5	-	19.5	17	11	307
GN 24-80-M10-80-D1-SK	80	M 10	80	54.5	8.5	2	19.5	17	11	327
GN 24-80-M10-100-D0-SK	80	M 10	100	54.5	8.5	-	19.5	17	11	319
GN 24-80-M10-100-D1-SK	80	M 10	100	54.5	8.5	2	19.5	17	11	339
GN 24-80-M12-60-D0-SK	80	M 12	60	54.5	8.5	-	19.5	17	16	316
GN 24-80-M12-60-D1-SK	80	M 12	60	54.5	8.5	2	19.5	17	16	337
GN 24-80-M12-80-D0-SK	80	M 12	80	54.5	8.5	-	19.5	17	16	334
GN 24-80-M12-80-D1-SK	80	M 12	80	54.5	8.5	2	19.5	17	16	354
GN 24-80-M12-100-D0-SK	80	M 12	100	54.5	8.5	-	19.5	17	16	352
GN 24-80-M12-100-D1-SK	80	M 12	100	54.5	8.5	2	19.5	17	16	372
GN 24-80-M12-125-D0-SK	80	M 12	125	54.5	8.5	-	19.5	17	16	374
GN 24-80-M12-125-D1-SK	80	M 12	125	54.5	8.5	2	19.5	17	16	394
GN 24-100-M8-40-D0-SK	100	M 8	40	70.5	9	-	20.5	17	6	446
GN 24-100-M8-40-D1-SK	100	M 8	40	70.5	9	3	20.5	17	6	484
GN 24-100-M8-50-D0-SK	100	M 8	50	70.5	9	-	20.5	17	6	450
GN 24-100-M8-50-D1-SK	100	M 8	50	70.5	9	3	20.5	17	6	488
GN 24-100-M8-63-D0-SK	100	M 8	63	70.5	9	-	20.5	17	6	455
GN 24-100-M8-63-D1-SK	100	M 8	63	70.5	9	3	20.5	17	6	493
GN 24-100-M10-50-D0-SK	100	M 10	50	70.5	9	-	20.5	17	11	466
GN 24-100-M10-50-D1-SK	100	M 10	50	70.5	9	3	20.5	17	11	504
GN 24-100-M10-60-D0-SK	100	M 10	60	70.5	9	-	20.5	17	11	472
GN 24-100-M10-60-D1-SK	100	M 10	60	70.5	9	3	20.5	17	11	511
GN 24-100-M10-80-D0-SK	100	M 10	80	70.5	9	-	20.5	17	11	484
GN 24-100-M10-80-D1-SK	100	M 10	80	70.5	9	3	20.5	17	11	523
GN 24-100-M10-100-D0-SK	100	M 10	100	70.5	9	-	20.5	17	11	496
GN 24-100-M10-100-D1-SK	100	M 10	100	70.5	9	3	20.5	17	11	535
GN 24-100-M12-60-D0-SK	100	M 12	60	70.5	9	-	20.5	17	16	494
GN 24-100-M12-60-D1-SK	100	M 12	60	70.5	9	3	20.5	17	16	532
GN 24-100-M12-80-D0-SK	100	M 12	80	70.5	9	-	20.5	17	16	511
GN 24-100-M12-80-D1-SK	100	M 12	80	70.5	9	3	20.5	17	16	550
GN 24-100-M12-100-D0-SK	100	M 12	100	70.5	9	-	20.5	17	16	529
GN 24-100-M12-100-D1-SK	100	M 12	100	70.5	9	3	20.5	17	16	568
GN 24-100-M12-125-D0-SK	100	M 12	125	70.5	9	-	20.5	17	16	551
GN 24-100-M12-125-D1-SK	100	M 12	125	70.5	9	3	20.5	17	16	590

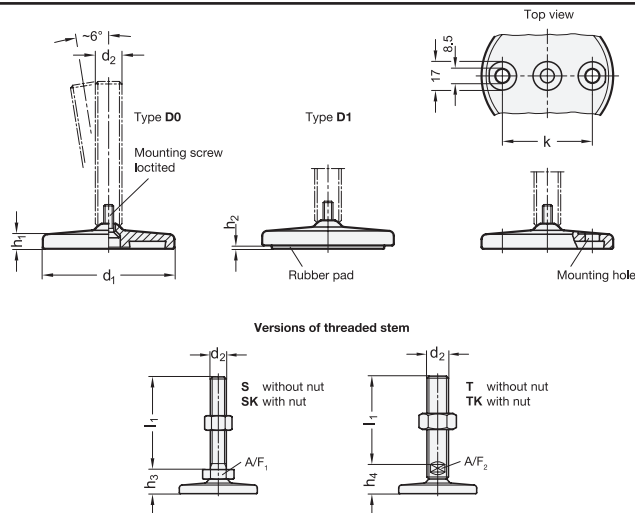

GN 24-T


STAINLESS STEEL

Description	d1	d2	l1	k	h1	h2	h4	A/F 2	Static load in kN	
GN 24-80-M16-75-D0-T	80	M 16	75	54,5	8,5	-	25,5	12	17	370
GN 24-80-M16-75-D1-T	80	M 16	75	54,5	8,5	2	25,5	12	17	390
GN 24-80-M16-100-D0-T	80	M 16	100	54,5	8,5	-	25,5	12	17	409
GN 24-80-M16-100-D1-T	80	M 16	100	54,5	8,5	2	25,5	12	17	430
GN 24-80-M16-125-D0-T	80	M 16	125	54,5	8,5	-	25,5	12	17	448
GN 24-80-M16-125-D1-T	80	M 16	125	54,5	8,5	2	25,5	12	17	469
GN 24-80-M16-150-D0-T	80	M 16	150	54,5	8,5	-	25,5	12	17	488
GN 24-80-M16-150-D1-T	80	M 16	150	54,5	8,5	2	25,5	12	17	508
GN 24-80-M16-200-D0-T	80	M 16	200	54,5	8,5	-	25,5	12	17	566
GN 24-80-M16-200-D1-T	80	M 16	200	54,5	8,5	2	25,5	12	17	586
GN 24-80-M16-250-D0-T	80	M 16	250	54,5	8,5	-	25,5	12	17	644
GN 24-80-M16-250-D1-T	80	M 16	250	54,5	8,5	2	25,5	12	17	665
GN 24-80-M20-75-D0-T	80	M 20	75	54,5	8,5	-	27	15	28	447
GN 24-80-M20-75-D1-T	80	M 20	75	54,5	8,5	2	27	15	28	468
GN 24-80-M20-100-D0-T	80	M 20	100	54,5	8,5	-	27	15	28	509
GN 24-80-M20-100-D1-T	80	M 20	100	54,5	8,5	2	27	15	28	529
GN 24-80-M20-125-D0-T	80	M 20	125	54,5	8,5	-	27	15	28	570
GN 24-80-M20-125-D1-T	80	M 20	125	54,5	8,5	2	27	15	28	590
GN 24-80-M20-150-D0-T	80	M 20	150	54,5	8,5	-	27	15	28	631
GN 24-80-M20-150-D1-T	80	M 20	150	54,5	8,5	2	27	15	28	652
GN 24-80-M20-200-D0-T	80	M 20	200	54,5	8,5	-	27	15	28	754
GN 24-80-M20-200-D1-T	80	M 20	200	54,5	8,5	2	27	15	28	774
GN 24-80-M20-250-D0-T	80	M 20	250	54,5	8,5	-	27	15	28	876
GN 24-80-M20-250-D1-T	80	M 20	250	54,5	8,5	2	27	15	28	897
GN 24-80-M24-100-D0-T	80	M 24	100	54,5	8,5	-	30,5	19	46	640
GN 24-80-M24-100-D1-T	80	M 24	100	54,5	8,5	2	30,5	19	46	660
GN 24-80-M24-125-D0-T	80	M 24	125	54,5	8,5	-	30,5	19	46	728
GN 24-80-M24-125-D1-T	80	M 24	125	54,5	8,5	2	30,5	19	46	748
GN 24-80-M24-150-D0-T	80	M 24	150	54,5	8,5	-	30,5	19	46	816
GN 24-80-M24-150-D1-T	80	M 24	150	54,5	8,5	2	30,5	19	46	836
GN 24-80-M24-200-D0-T	80	M 24	200	54,5	8,5	-	30,5	19	46	992
GN 24-80-M24-200-D1-T	80	M 24	200	54,5	8,5	2	30,5	19	46	1015
GN 24-80-M24-300-D0-T	80	M 24	300	54,5	8,5	-	30,5	19	46	1345
GN 24-80-M24-300-D1-T	80	M 24	300	54,5	8,5	2	30,5	19	46	1365
GN 24-100-M16-75-D0-T	100	M 16	75	70,5	9	-	26,5	12	17	548
GN 24-100-M16-75-D1-T	100	M 16	75	70,5	9	3	26,5	12	17	586
GN 24-100-M16-100-D0-T	100	M 16	100	70,5	9	-	26,5	12	17	587
GN 24-100-M16-100-D1-T	100	M 16	100	70,5	9	3	26,5	12	17	626
GN 24-100-M16-125-D0-T	100	M 16	125	70,5	9	-	26,5	12	17	626
GN 24-100-M16-125-D1-T	100	M 16	125	70,5	9	3	26,5	12	17	665
GN 24-100-M16-150-D0-T	100	M 16	150	70,5	9	-	26,5	12	17	665
GN 24-100-M16-150-D1-T	100	M 16	150	70,5	9	3	26,5	12	17	704
GN 24-100-M16-200-D0-T	100	M 16	200	70,5	9	-	26,5	12	17	744
GN 24-100-M16-200-D1-T	100	M 16	200	70,5	9	3	26,5	12	17	782
GN 24-100-M16-250-D0-T	100	M 16	250	70,5	9	-	26,5	12	17	822

GN 24-T

STAINLESS STEEL

Description	d1	d2	l1	k	h1	h2	h4	A/F 2	Static load in kN	
GN 24-100-M16-250-D1-T	100	M 16	250	70,5	9	3	26,5	12	17	861
GN 24-100-M20-75-D0-T	100	M 20	75	70,5	9	-	28	15	28	624
GN 24-100-M20-75-D1-T	100	M 20	75	70,5	9	3	28	15	28	662
GN 24-100-M20-100-D0-T	100	M 20	100	70,5	9	-	28	15	28	685
GN 24-100-M20-100-D1-T	100	M 20	100	70,5	9	3	28	15	28	724
GN 24-100-M20-125-D0-T	100	M 20	125	70,5	9	-	28	15	28	746
GN 24-100-M20-125-D1-T	100	M 20	125	70,5	9	3	28	15	28	785
GN 24-100-M20-150-D0-T	100	M 20	150	70,5	9	-	28	15	28	807
GN 24-100-M20-150-D1-T	100	M 20	150	70,5	9	3	28	15	28	846
GN 24-100-M20-200-D0-T	100	M 20	200	70,5	9	-	28	15	28	930
GN 24-100-M20-200-D1-T	100	M 20	200	70,5	9	3	28	15	28	969
GN 24-100-M20-250-D0-T	100	M 20	250	70,5	9	-	28	15	28	1050
GN 24-100-M20-250-D1-T	100	M 20	250	70,5	9	3	28	15	28	1090
GN 24-100-M24-100-D0-T	100	M 24	100	70,5	9	-	31,5	19	46	817
GN 24-100-M24-100-D1-T	100	M 24	100	70,5	9	3	31,5	19	46	855
GN 24-100-M24-125-D0-T	100	M 24	125	70,5	9	-	31,5	19	46	905
GN 24-100-M24-125-D1-T	100	M 24	125	70,5	9	3	31,5	19	46	944
GN 24-100-M24-150-D0-T	100	M 24	150	70,5	9	-	31,5	19	46	993
GN 24-100-M24-150-D1-T	100	M 24	150	70,5	9	3	31,5	19	46	1030
GN 24-100-M24-200-D0-T	100	M 24	200	70,5	9	-	31,5	19	46	1170
GN 24-100-M24-200-D1-T	100	M 24	200	70,5	9	3	31,5	19	46	1210
GN 24-100-M24-300-D0-T	100	M 24	300	70,5	9	-	31,5	19	46	1525
GN 24-100-M24-300-D1-T	100	M 24	300	70,5	9	3	31,5	19	46	1530
GN 24-120-M20-75-D0-T	120	M 20	75	95,5	12	-	32	15	28	998
GN 24-120-M20-75-D1-T	120	M 20	75	95,5	12	3,5	32	15	28	1070
GN 24-120-M20-100-D0-T	120	M 20	100	95,5	12	-	32	15	28	1060
GN 24-120-M20-100-D1-T	120	M 20	100	95,5	12	3,5	32	15	28	1135
GN 24-120-M20-125-D0-T	120	M 20	125	95,5	12	-	32	15	28	1120
GN 24-120-M20-125-D1-T	120	M 20	125	95,5	12	3,5	32	15	28	1195
GN 24-120-M20-150-D0-T	120	M 20	150	95,5	12	-	32	15	28	1180
GN 24-120-M20-150-D1-T	120	M 20	150	95,5	12	3,5	32	15	28	1255
GN 24-120-M20-200-D0-T	120	M 20	200	95,5	12	-	32	15	28	1305
GN 24-120-M20-200-D1-T	120	M 20	200	95,5	12	3,5	32	15	28	1380
GN 24-120-M20-250-D0-T	120	M 20	250	95,5	12	-	32	15	28	1425
GN 24-120-M20-250-D1-T	120	M 20	250	95,5	12	3,5	32	15	28	1500
GN 24-120-M24-100-D0-T	120	M 24	100	95,5	12	-	35,5	19	46	1185
GN 24-120-M24-100-D1-T	120	M 24	100	95,5	12	3,5	35,5	19	46	1255
GN 24-120-M24-125-D0-T	120	M 24	125	95,5	12	-	35,5	19	46	1270
GN 24-120-M24-125-D1-T	120	M 24	125	95,5	12	3,5	35,5	19	46	1345
GN 24-120-M24-150-D0-T	120	M 24	150	95,5	12	-	35,5	19	46	1360
GN 24-120-M24-150-D1-T	120	M 24	150	95,5	12	3,5	35,5	19	46	1435
GN 24-120-M24-200-D0-T	120	M 24	200	95,5	12	-	35,5	19	46	1535
GN 24-120-M24-200-D1-T	120	M 24	200	95,5	12	3,5	35,5	19	46	1610
GN 24-120-M24-300-D0-T	120	M 24	300	95,5	12	-	35,5	19	46	1890
GN 24-120-M24-300-D1-T	120	M 24	300	95,5	12	3,5	35,5	19	46	1965

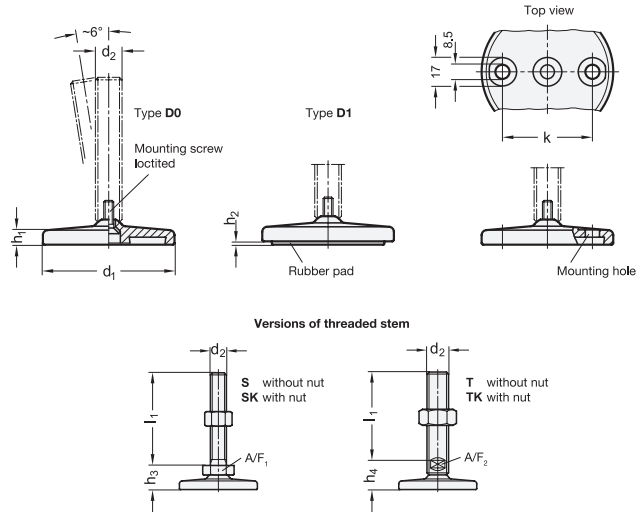

GN 24-TK

STAINLESS STEEL

GN 24-TK

STAINLESS STEEL

Description	d1	d2	l1	k	h1	h2	h4	A/F 2	Static load in kN	
GN 24-80-M16-75-D0-TK	80	M 16	75	54.5	8.5	-	25.5	12	17	409
GN 24-80-M16-75-D1-TK	80	M 16	75	54.5	8.5	2	25.5	12	17	430
GN 24-80-M16-100-D0-TK	80	M 16	100	54.5	8.5	-	25.5	12	17	449
GN 24-80-M16-100-D1-TK	80	M 16	100	54.5	8.5	2	25.5	12	17	469
GN 24-80-M16-125-D0-TK	80	M 16	125	54.5	8.5	-	25.5	12	17	488
GN 24-80-M16-125-D1-TK	80	M 16	125	54.5	8.5	2	25.5	12	17	508
GN 24-80-M16-150-D0-TK	80	M 16	150	54.5	8.5	-	25.5	12	17	527
GN 24-80-M16-150-D1-TK	80	M 16	150	54.5	8.5	2	25.5	12	17	547
GN 24-80-M16-200-D0-TK	80	M 16	200	54.5	8.5	-	25.5	12	17	605
GN 24-80-M16-200-D1-TK	80	M 16	200	54.5	8.5	2	25.5	12	17	626
GN 24-80-M16-250-D0-TK	80	M 16	250	54.5	8.5	-	25.5	12	17	684
GN 24-80-M16-250-D1-TK	80	M 16	250	54.5	8.5	2	25.5	12	17	704
GN 24-80-M20-75-D0-TK	80	M 20	75	54.5	8.5	-	27	15	28	522
GN 24-80-M20-75-D1-TK	80	M 20	75	54.5	8.5	2	27	15	28	543
GN 24-80-M20-100-D0-TK	80	M 20	100	54.5	8.5	-	27	15	28	583
GN 24-80-M20-100-D1-TK	80	M 20	100	54.5	8.5	2	27	15	28	604
GN 24-80-M20-125-D0-TK	80	M 20	125	54.5	8.5	-	27	15	28	645
GN 24-80-M20-125-D1-TK	80	M 20	125	54.5	8.5	2	27	15	28	665
GN 24-80-M20-150-D0-TK	80	M 20	150	54.5	8.5	-	27	15	28	706
GN 24-80-M20-150-D1-TK	80	M 20	150	54.5	8.5	2	27	15	28	726
GN 24-80-M20-200-D0-TK	80	M 20	200	54.5	8.5	-	27	15	28	829
GN 24-80-M20-200-D1-TK	80	M 20	200	54.5	8.5	2	27	15	28	849
GN 24-80-M20-250-D0-TK	80	M 20	250	54.5	8.5	-	27	15	28	951
GN 24-80-M20-250-D1-TK	80	M 20	250	54.5	8.5	2	27	15	28	971
GN 24-80-M24-100-D0-TK	80	M 24	100	54.5	8.5	-	30.5	19	46	768
GN 24-80-M24-100-D1-TK	80	M 24	100	54.5	8.5	2	30.5	19	46	789
GN 24-80-M24-125-D0-TK	80	M 24	125	54.5	8.5	-	30.5	19	46	856
GN 24-80-M24-125-D1-TK	80	M 24	125	54.5	8.5	2	30.5	19	46	877
GN 24-80-M24-150-D0-TK	80	M 24	150	54.5	8.5	-	30.5	19	46	945
GN 24-80-M24-150-D1-TK	80	M 24	150	54.5	8.5	2	30.5	19	46	965
GN 24-80-M24-200-D0-TK	80	M 24	200	54.5	8.5	-	30.5	19	46	1120
GN 24-80-M24-200-D1-TK	80	M 24	200	54.5	8.5	2	30.5	19	46	1140
GN 24-80-M24-300-D0-TK	80	M 24	300	54.5	8.5	-	30.5	19	46	1475
GN 24-80-M24-300-D1-TK	80	M 24	300	54.5	8.5	2	30.5	19	46	1495
GN 24-100-M16-75-D0-TK	100	M 16	75	70.5	9	-	26.5	12	17	587
GN 24-100-M16-75-D1-TK	100	M 16	75	70.5	9	3	26.5	12	17	626
GN 24-100-M16-100-D0-TK	100	M 16	100	70.5	9	-	26.5	12	17	626
GN 24-100-M16-100-D1-TK	100	M 16	100	70.5	9	3	26.5	12	17	665
GN 24-100-M16-125-D0-TK	100	M 16	125	70.5	9	-	26.5	12	17	666
GN 24-100-M16-125-D1-TK	100	M 16	125	70.5	9	3	26.5	12	17	704
GN 24-100-M16-150-D0-TK	100	M 16	150	70.5	9	-	26.5	12	17	705
GN 24-100-M16-150-D1-TK	100	M 16	150	70.5	9	3	26.5	12	17	743
GN 24-100-M16-200-D0-TK	100	M 16	200	70.5	9	-	26.5	12	17	783
GN 24-100-M16-200-D1-TK	100	M 16	200	70.5	9	3	26.5	12	17	822
GN 24-100-M16-250-D0-TK	100	M 16	250	70.5	9	-	26.5	12	17	862

Description	d1	d2	l1	k	h1	h2	h4	A/F 2	Static load in kN	
GN 24-100-M16-250-D1-TK	100	M 16	250	70.5	9	3	26.5	12	17	900
GN 24-100-M20-75-D0-TK	100	M 20	75	70.5	9	-	28	15	28	698
GN 24-100-M20-75-D1-TK	100	M 20	75	70.5	9	3	28	15	28	737
GN 24-100-M20-100-D0-TK	100	M 20	100	70.5	9	-	28	15	28	760
GN 24-100-M20-100-D1-TK	100	M 20	100	70.5	9	3	28	15	28	798
GN 24-100-M20-125-D0-TK	100	M 20	125	70.5	9	-	28	15	28	821
GN 24-100-M20-125-D1-TK	100	M 20	125	70.5	9	3	28	15	28	860
GN 24-100-M20-150-D0-TK	100	M 20	150	70.5	9	-	28	15	28	882
GN 24-100-M20-150-D1-TK	100	M 20	150	70.5	9	3	28	15	28	921
GN 24-100-M20-200-D0-TK	100	M 20	200	70.5	9	-	28	15	28	1005
GN 24-100-M20-200-D1-TK	100	M 20	200	70.5	9	3	28	15	28	1045
GN 24-100-M20-250-D0-TK	100	M 20	250	70.5	9	-	28	15	28	1125
GN 24-100-M20-250-D1-TK	100	M 20	250	70.5	9	3	28	15	28	1165
GN 24-100-M24-100-D0-TK	100	M 24	100	70.5	9	-	31.5	19	46	945
GN 24-100-M24-100-D1-TK	100	M 24	100	70.5	9	3	31.5	19	46	984
GN 24-100-M24-125-D0-TK	100	M 24	125	70.5	9	-	31.5	19	46	1035
GN 24-100-M24-125-D1-TK	100	M 24	125	70.5	9	3	31.5	19	46	1070
GN 24-100-M24-150-D0-TK	100	M 24	150	70.5	9	-	31.5	19	46	1120
GN 24-100-M24-150-D1-TK	100	M 24	150	70.5	9	3	31.5	19	46	1160
GN 24-100-M24-200-D0-TK	100	M 24	200	70.5	9	-	31.5	19	46	1300
GN 24-100-M24-200-D1-TK	100	M 24	200	70.5	9	3	31.5	19	46	1335
GN 24-100-M24-300-D0-TK	100	M 24	300	70.5	9	-	31.5	19	46	1650
GN 24-100-M24-300-D1-TK	100	M 24	300	70.5	9	3	31.5	19	46	1690
GN 24-120-M20-75-D0-TK	120	M 20	75	95.5	12	-	32	15	28	1075
GN 24-120-M20-75-D1-TK	120	M 20	75	95.5	12	3.5	32	15	28	1145
GN 24-120-M20-100-D0-TK	120	M 20	100	95.5	12	-	32	15	28	1135
GN 24-120-M20-100-D1-TK	120	M 20	100	95.5	12	3.5	32	15	28	1210
GN 24-120-M20-125-D0-TK	120	M 20	125	95.5	12	-	32	15	28	1195
GN 24-120-M20-125-D1-TK	120	M 20	125	95.5	12	3.5	32	15	28	1270
GN 24-120-M20-150-D0-TK	120	M 20	150	95.5	12	-	32	15	28	1255
GN 24-120-M20-150-D1-TK	120	M 20	150	95.5	12	3.5	32	15	28	1330
GN 24-120-M20-200-D0-TK	120	M 20	200	95.5	12	-	32	15	28	1380
GN 24-120-M20-200-D1-TK	120	M 20	200	95.5	12	3.5	32	15	28	1455
GN 24-120-M20-250-D0-TK	120	M 20	250	95.5	12	-	32	15	28	1500
GN 24-120-M20-250-D1-TK	120	M 20	250	95.5	12	3.5	32	15	28	1575
GN 24-120-M24-100-D0-TK	120	M 24	100	95.5	12	-	35.5	19	46	1310
GN 24-120-M24-100-D1-TK	120	M 24	100	95.5	12	3.5	35.5	19	46	1385
GN 24-120-M24-125-D0-TK	120	M 24	125	95.5	12	-	35.5	19	46	1400
GN 24-120-M24-125-D1-TK	120	M 24	125	95.5	12	3.5	35.5	19	46	1475
GN 24-120-M24-150-D0-TK	120	M 24	150	95.5	12	-	35.5	19	46	1490
GN 24-120-M24-150-D1-TK	120	M 24	150	95.5	12	3.5	35.5	19	46	1560
GN 24-120-M24-200-D0-TK	120	M 24	200	95.5	12	-	35.5	19	46	1665
GN 24-120-M24-200-D1-TK	120	M 24	200	95.5	12	3.5	35.5	19	46	1740
GN 24-120-M24-300-D0-TK	120	M 24	300	95.5	12	-	35.5	19	46	2015
GN 24-120-M24-300-D1-TK	120	M 24	300	95.5	12	3.5	35.5	19	46	2090