



1-154.01 L-Handle for Padlock Pr20.1 L18



Advantages

- Quarter-turn with L-handle for padlock with cylinder barrel or spring-loaded slotted insert.
- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by grounding nut.
- On request parts can be assembled by DIRAK.
- The quarter-turn can be screwed into the cutout with the pre-assembled cam.
- All lockable handles supplied with two keys.

Materials

- **L-handle:** zinc die, black
- **Housing:** zinc die, zinc plated
- **Slotted insert:** zinc die, chrome plated
- **Cylinder barrel:** zinc die, with stainless dust cap
- **Grounding nut:** zinc die

Remarks

(S) Door-thickness max. 8mm
Please configure the quarter-turn with a cam.
Padlock feature only if cam is at 90° to the L-handle.



Quarter-Turn with L-handle for padlock

	Part Number	Version	Insert	Latching type	Installation type	Delivery Unit
a)	200-9488.00-00000	E-coated		keyed alike DIRAK 1333	screw-on	1 pcs.
a)	200-9488.TX-00000	Textured powder, black		keyed alike DIRAK 1333	screw-on	1 pcs.
a)	200-9490.00-00000	E-coated		keyed different	screw-on	1 pcs.
a)	200-9490.TX-00000	Textured powder, black		keyed different	screw-on	1 pcs.
b)	200-9489.00-00000	E-coated	Slotted 2x4mm		screw-on	1 pcs.
b)	200-9489.TX-00000	Textured powder, black	Slotted 2x4mm		screw-on	1 pcs.


Assembly options

200-0020.00-00000 **Assembling cam, LH door**

200-0021.00-00000 **Assembling cam, RH door**

Accessories

- c) 1-102 Cams L35/45 Steel
- c) 1-262 Cams variable

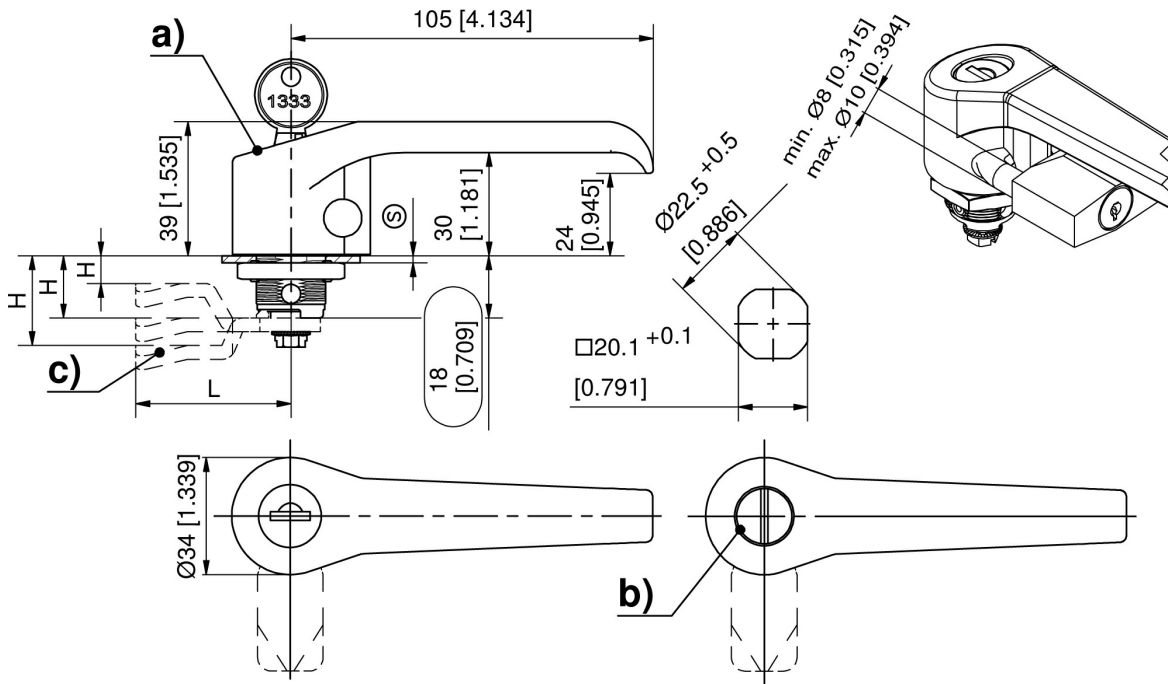

Einbauanleitung für 1-154 und 154.01 / installation instructions for 1-154 and 154.01

Einbaustellung des Gehäuses, gesehen von der Türseite, bei: / fitting position of housing, seen from outside of the door, at:

