



## 1-154 L-Handle for Padlock Pr20.1 L18/40



### Advantages

- L-handle for cutout 20.1.
- IP65 according to DIN EN 60529.
- RH / LH application.
- Grounding by grounding nut.
- On request parts can be assembled by DIRAK.
- The L-handle can be screwed into the cutout with the pre-assembled cam.

### Materials

- **L-handle:** zinc die, chrome plated or black
- **Housing:** zinc die, zinc plated
- **Grounding nut:** zinc die

### Remarks

(S) Door-thickness see table  
Please configure the L-handle with a cam.  
Padlock feature only if cam is at 90° to the L-handle.



## L-Handle for Padlock

	Part Number	Surface	Version	Housing length	Door-thickness (S)	Installation type	Delivery Unit
a)	200-9463.00-00000	chrome plated	glossy	18 mm	max. 8 mm	screw-on	1 pcs.
a)	200-9464.00-00000	black	E-coated	18 mm	max. 8 mm	screw-on	1 pcs.
a)	200-9464.TX-00000	black	Textured powder, black	18 mm	max. 8 mm	screw-on	1 pcs.
b)	200-9491.00-00000	chrome plated	glossy	40 mm	max. 30 mm	screw-on	1 pcs.
b)	200-9492.00-00000	black	E-coated	40 mm	max. 30 mm	screw-on	1 pcs.
b)	200-9492.TX-00000	black	Textured powder, black	40 mm	max. 30 mm	screw-on	1 pcs.



## Assembly options


200-0020.00-00000 **Assembling cam, LH door**

200-0021.00-00000 **Assembling cam, RH door**



## Accessories

- c) 1-102 Cams L35/45 Steel
- c) 1-262 Cams variable

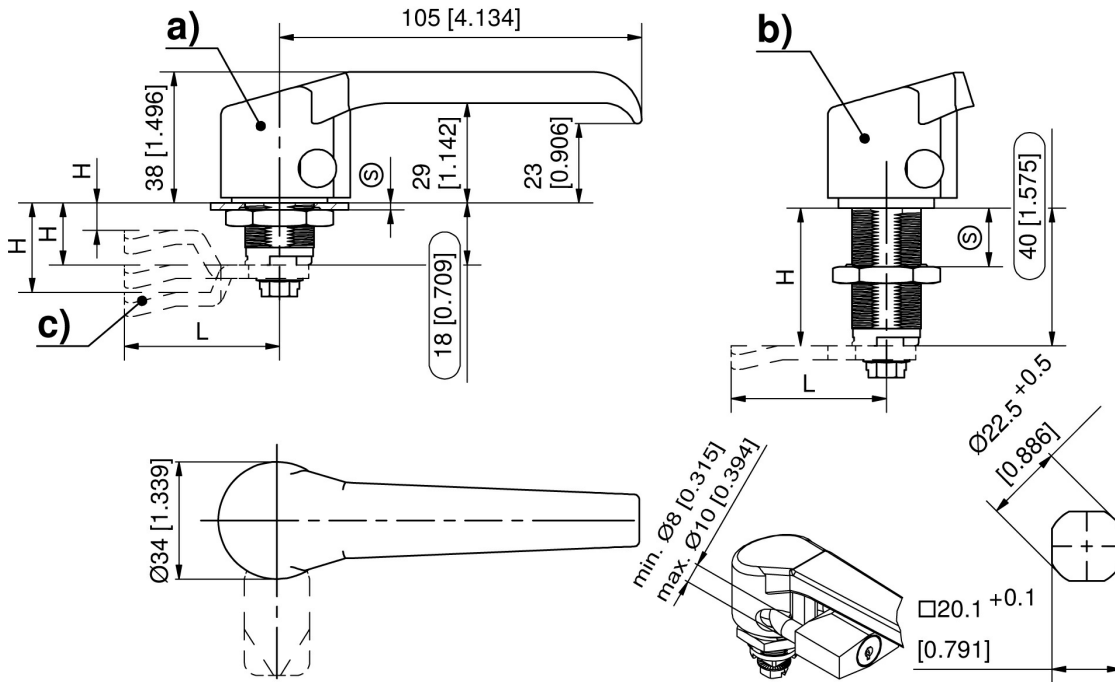

## Einbauanleitung für 1-154 und 154.01 / installation instructions for 1-154 and 154.01

Einbaustellung des Gehäuses, gesehen von der Türseite, bei: / fitting position of housing, seen from outside of the door, at:

